


Trike 400

technical specifications

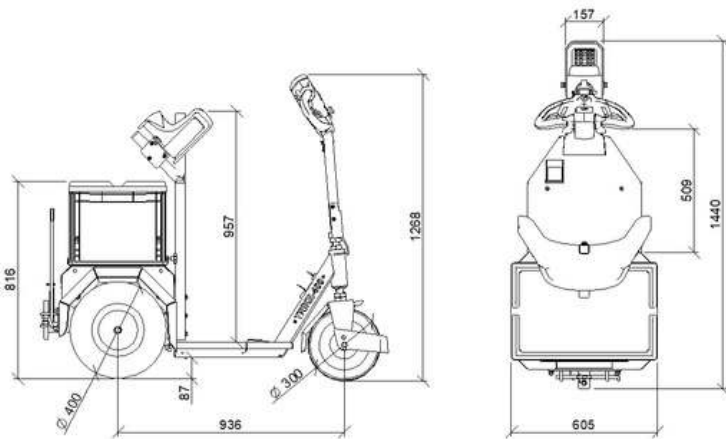

Manufacturer	Metazet B.V.
Turning circle	2200 mm
Water tightness	IP21
Nominal tensile force	52.3 N
Towing weight	250 Kg [according to VDI 2198]
Vehicle weight (excl. battery)	120.5 Kg
Material	Steel
After treatment	Powdercoating
Max forward speed (turtle)	8 Km/h
Max. forward speed (hare)	12 Km/h
Max. speed reverse (turtle)	5 Km/h
Max. speed backwards (hare)	9 Km/h
Time to reach max. speed	3 sec
Pallet dimensions	1500 x 800 mm
Motor type	DC motor
Driver	Transaxle
Power	400 W
Battery type	Lithium
Battery voltage	24 V
Battery capacity	40 Ah
Battery weight	10 Kg
Battery charger type	High frequency
Battery charger input voltage	110/230 V
Battery charger output voltage	24 V
Battery charger output power	8 A
Controls	Programable DC controller
Control Voltage	24 V
Control max. power	70 A
Max. driver weight	125 Kg
Load bearing capacity (evenly distributed)	40 Kg
Brakes	Electric brake